

loci™

Installation instructions

100-240V
150W LED (per illuminator)
3000K



 graypants®

www.graypants.com
206.420.3912
seattle@graypants.com


Loci
Installation instructions

Warranty

Graypants warrants its products against defects in material or workmanship for a period of 90 days from delivery. Repair or replacement of the product is the exclusive remedy of the consumer. To obtain warranty service, you must deliver the product in its original packaging, or packaging affording an equal degree of protection, to Graypants' Seattle factory. This warranty does not cover damage arising from wear and tear, or any willful damage, negligence, subjection to abnormal working conditions, failure to follow the seller's written instructions, misuse or alteration or repair of a product, or any other act or omission on the part of the consumer.


Parts List

Canopy + Pre-installed fiber (x2)

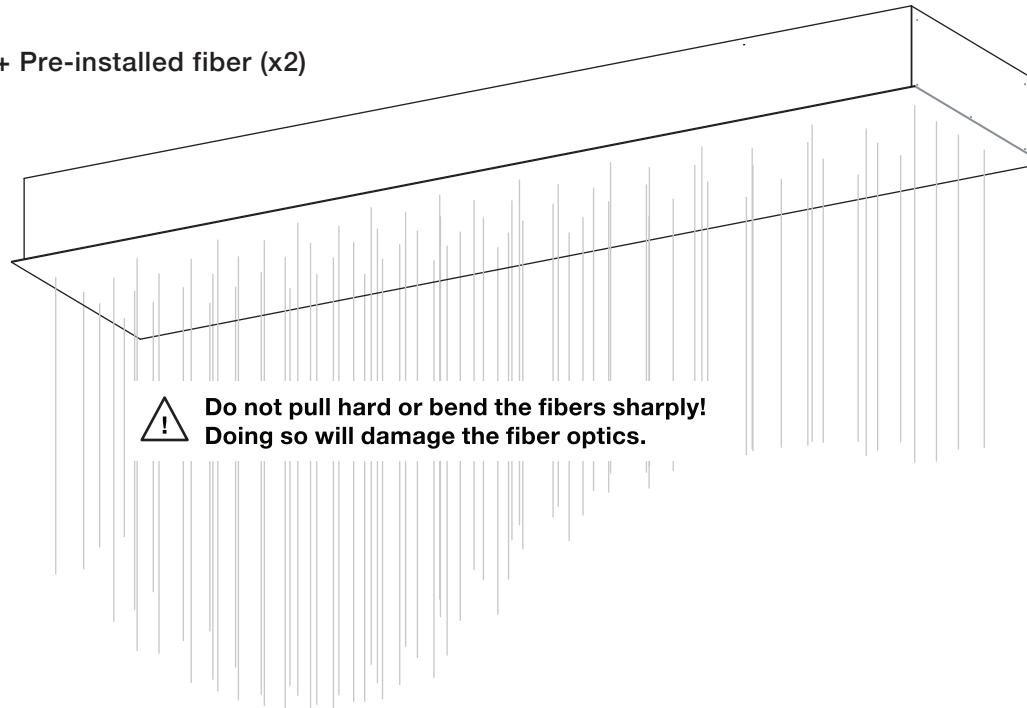


Do not pull hard or bend the fibers sharply!
Doing so will damage the fiber optics.

B

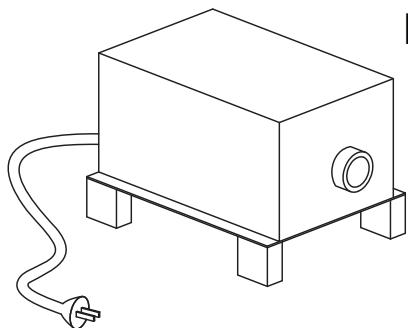

Illuminator + Hex stilts (x2)

C



Acrylic cube pendant (x149)

D



Black acorn hex nut (x24)

Installation Instructions

1. Plug illuminator into power.

Note: You may need an extension cable, as illuminators must stay in the location they were delivered in.

2. Raise first canopy (**A**) up into pre-installed 1/4-20 threaded rods (not supplied by graypants)


This may take 2-4 people to lift and get canopy in place

Note: reference shop drawing included with these instructions for specific threaded rod locations

3. Once canopy is raised flush with the ceiling and threaded rod is protruding from bottom of canopy, fasten canopy in place with hex acorn nuts (**D**)

4. Repeat steps 1-3 for second canopy.


Note: Canopies Must be installed in correct orientation. Reference Shop drawing included with these instructions for canopy orientation (Illuminators will be on same side of installation)

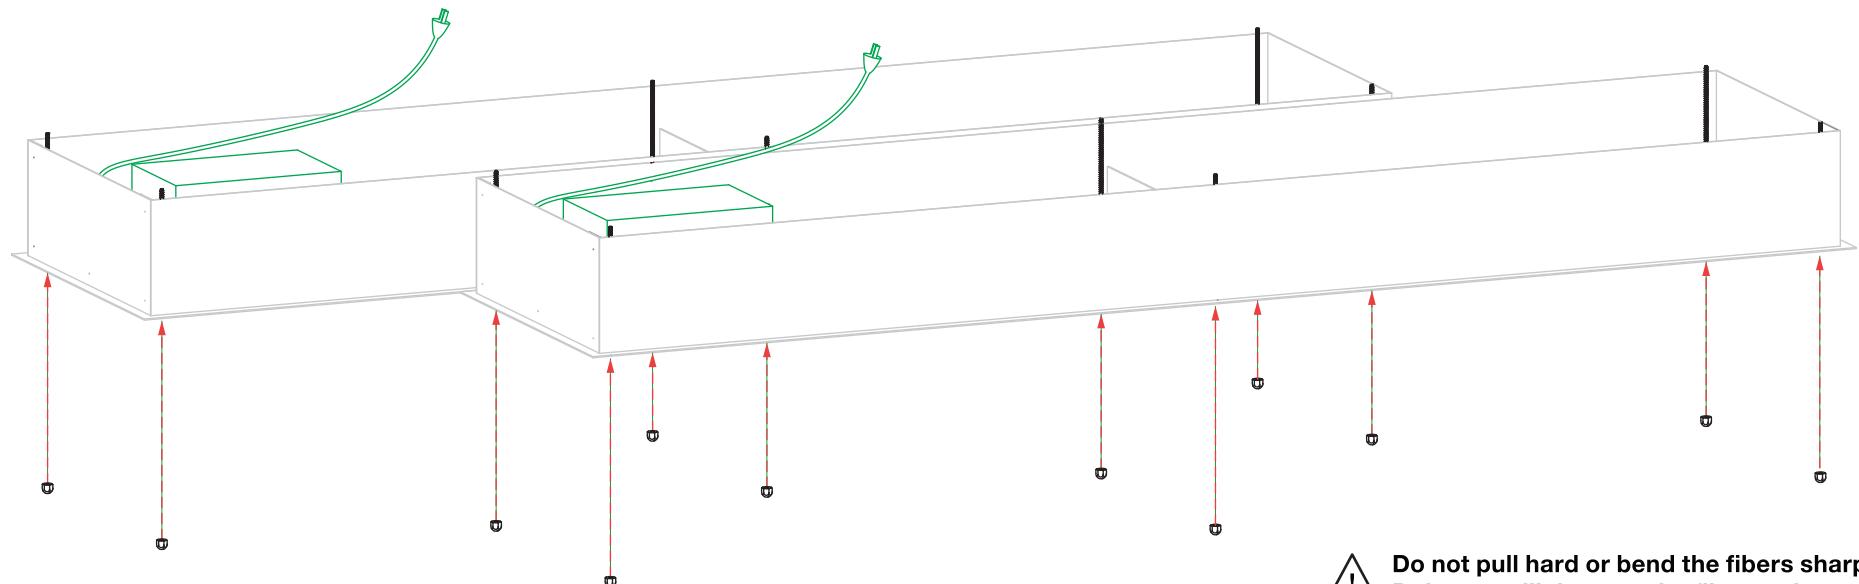


Installation Instructions

5. Install acrylic diffusers **(C) Use supplied gloves to prevent staining acrylic**
6. Remove any protective packaging from installation
7. Make any necessary fiber drop length adjustments if any fibers were pushed up into canopy during shipping.
Note: Orange flags above canopy will keep drop lengths where they need to be.
DO NOT FORCE FLAG THROUGH HARDWARE.

Diffuser installation

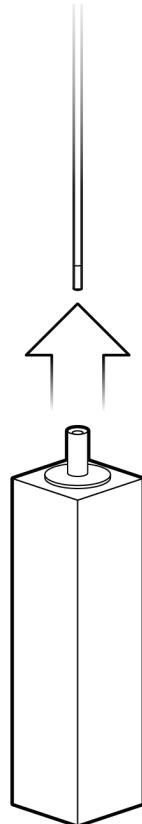

To attach the diffuser,
insert the fiber optic
cable into the top of the
diffuser until it stops.

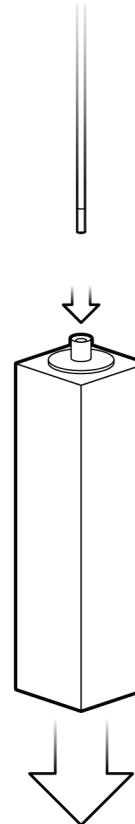

To remove the diffuser,
press down on the top of
the cable gripper.