


Loci

Swirl72 Pendant System



Color

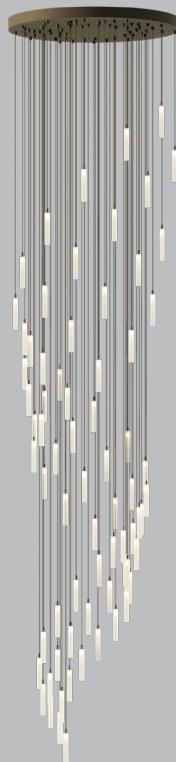

Black



White

North America

Lamping	0.4W integrated LED (replaceable)
Driver	Input voltage 120-277V Integral class 2 power supply TRIAC/ELV/0-10V dimming
Color temperature	2700K
Cord	Black TPE sheathed 3 conductor White TPE sheathed 3 conductor
Canopy	Black powder coated, Ø 32, H 2 (in) White powder coated, Ø 32, H 2 (in)
Material	Powder coated aluminum Acrylic diffuser
Size	L 32, W32, H 140, (in)
Weight	95 LBS
Country of origin	United States
Certification	


Dry locations only. Clean with a dry duster or compressed air.

Designed in Seattle, Washington, USA.

Custom cords and canopies are available. Contact our offices for more information.

Loci

Swirl72 Pendant System

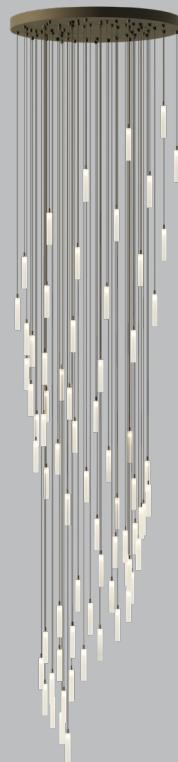

SPECIFICATION CODE

Example: QTY 1 LOCI-SW-72-R32-CA-140-SM-BP-BC

Qty.

LOCI - SW - 72 - R32 - CA - 1 - - - - 4

1 2 3 4

For each number, make one selection and enter into the corresponding box above. *Indicates modification with additional lead time and/or costs

1	2
140	140" (standard)
	SM Surface mounted

3	4
BP Black	BC Black
WP White	WC White
CP Custom	

*Drop length measured from top of canopy to bottom of lowest pendant.