

# Roest

## Vertical Pendant



### Color



#### Rust

15v | GP2000-N  
30v | GP2001-N  
45v | GP2002-N




#### Rust/Zinc

15v | GP2000-Z  
30v | GP2001-Z  
45v | GP2002-Z



#### Zinc

15v | GP2000-AZ  
30v | GP2001-AZ  
45v | GP2002-AZ



#### Carbon

15v | GP2000-C  
30v | GP2001-C  
45v | GP2002-C

### North America

|                          |                                                                     |
|--------------------------|---------------------------------------------------------------------|
| <b>Lamping</b>           | Max 10W LED, GU10, 120V<br>Optional Integrated LED                  |
| <b>Color temperature</b> | 2700K (recommended)                                                 |
| <b>Lumen output</b>      | Dependent on lamp                                                   |
| <b>Cord</b>              | Black, 6.5ft (16ft available)                                       |
| <b>Canopy</b>            | Black powder coated, Ø 5, H 1 (in)                                  |
| <b>Material</b>          | Steel                                                               |
| <b>Size</b>              | Ø 2.375, H 6 (in)<br>Ø 2.375, H 11.75 (in)<br>Ø 2.375, H 17.75 (in) |
| <b>Weight</b>            | 2.2lbs   3.3lbs   4.6lbs                                            |
| <b>Country of origin</b> | The Netherlands                                                     |

#### Certification




For use in dry location. After the natural oxidation process, all items are treated to stop further rusting. The material will not come off or stain.

**Designed by VanJoost,  
in The Netherlands for Graypants.**

Custom cords and canopies are available. Contact our offices for more information.

# Roest

Vertical Pendant


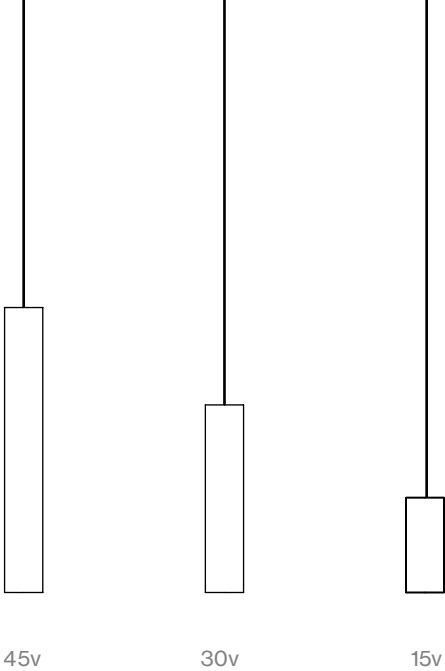


### SPECIFICATION CODE

Example: QTY 2 ROEST - GP2002-N-16-

Qty. ROEST — GP200 — — — —  
1 2 3 4

For each number, make one selection and enter into the corresponding box above. \*Indicates modification with additional lead time and/or costs

| SIZE |              | 1 | MATERIAL |                                                                                     |                                                                                     |                                                                                      | 2                                                                                     | CORD LENGTH |     | 3      |
|------|--------------|---|----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|-----|--------|
| 0    | 15v / 6"     |   | N        |  |  |  |  |             | STD | 6.5 ft |
| 1    | 30v / 11.75" |   | Z        |                                                                                     |                                                                                     |                                                                                      |                                                                                       |             | EXT | 16 ft  |
| 2    | 45v / 17.75" |   | AZ       |                                                                                     |                                                                                     |                                                                                      |                                                                                       |             |     |        |
|      |              |   | C        |                                                                                     |                                                                                     |                                                                                      |                                                                                       |             |     |        |

| LAMPING |                                                                               | 4 |
|---------|-------------------------------------------------------------------------------|---|
| GU10    | GU10 Socket<br>Max 10W LED, GU10, 120V                                        |   |
| INT     | Integrated LED*<br>12W COB LED, 0-10v dimming to 1%<br>80CRI, 120-277V, 2700K |   |